



173 Flanders Road
 Westborough, MA 01581
 ph 888-467-2836
 fax 877-297-2836

Pex Stainless Steel Cinch Clamps

- The **ORIGINAL** Patented PEX Assembly Clamp designated by ASTM F 2098
- Ingenious stepless design provides uniform compression for a 360° watertight seal
- Available for 3/8", 1/2", 5/8", 3/4", and 1" ASTM F 876/877 PEX Tubing sizes
- Specified for use with ASTM F 1807 & F 2159 Insert Fittings

Technical Data


Application: Hot and Cold Water Plumbing & Hydronic Heating

Max. Operating Temp. (°F): 180

Max. Operating Pressure (psi): 100

Material: Stainless Steel UNS S30400

Dimensions:

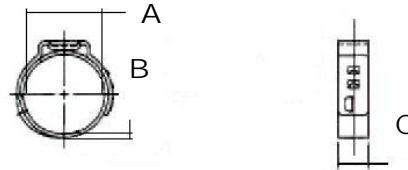

Nom. Size	"A"	"B"	"C"
3/8	0.524	0.024	0.276
1/2	0.689	0.031	0.276
3/4	0.917	0.031	0.354
1	1.165	0.039	0.394
5/8	0.819	0.031	0.276



must be purchased in bag quantity

ITEM #	DESCRIPTION	BAG	MASTER
PCC38	3/8" Pex SS Cinch Clamp	100	6000
PCC12	1/2" Pex SS Cinch Clamp	100	2000
PCC58	5/8" Pex SS Cinch Clamp	50	2500
PCC34	3/4" Pex SS Cinch Clamp	50	2000
PCC1	1" Pex SS Cinch Clamp	50	1300

Coming Soon

Copper Crimp Rings

